





ARRANGEMENTS

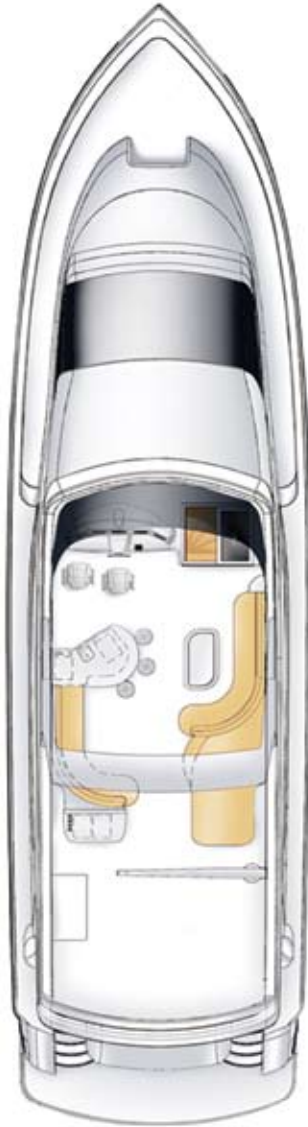

Standard Flybridge Arrangement

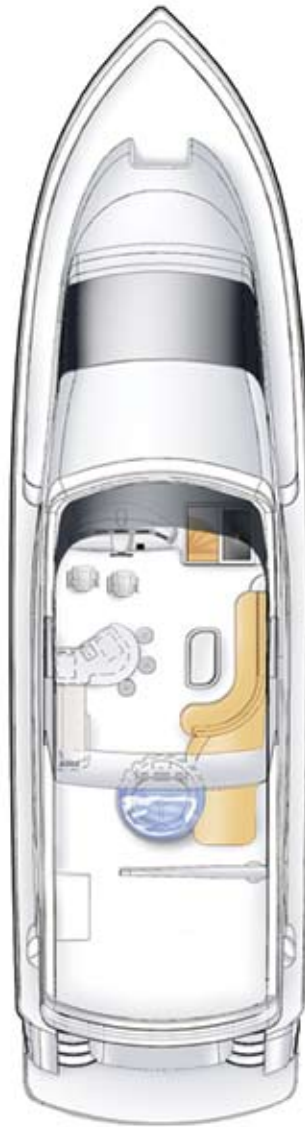

Optional Flybridge Arrangement with Hot Tub



Optional Enclosed Bridge Arrangement



Standard Upper Deck Arrangement



**Optional Upper Deck
Arrangement with Lower
Helm and Sunken Bar**

**Standard
Lower Deck
Arrangement**

**Optional Lower Deck
with His & Hers Head in Master,
Port Shower, Starboard Queen,
and Crew Lounge**

SPECIFICATIONS

Length Overall (B)	79'10"	24.33 meters
Beam	21'3"	6.48 meters
Draft (C)	5'8"	1.73 meters
Freeboard Forward (C)	8'1"	2.46 meters
Freeboard Aft (C)	6'10"	2.08 meters
Headroom Most Areas	6'6"	1.98 meters
Freshwater Capacity (C)	326 gallons	1,234 liters
Grey Water (C)	252 gallons	953 liters
Fuel Capacity (C)	2,858 gallons	10,819 liters
Holding Capacity (C)	388 gallons	1,468 liters
Weight Displacement	190,000 pounds	86,183 kilos
Height Above Waterline to:		
• Top of Flybridge Windshield (C)	18'10"	5.74 meters
• Top of Arch (C)	21'1"	6.43 meters
Waterline Length	68'10"	20.98 meters

ENGINE OPTIONS

Twin CAT C32 Diesel Engines	1550 BHP
Twin CAT C32 Diesel Engines	1650 BHP
Twin CAT C32 ACERT Diesel Engines	1800 BHP
Twin MTU 16V2000 Diesel Engines	2000 BHP
Twin MTU 16V2000 CR Diesel Engines	2400 BHP



Exterior Finish/Construction

- Isophthalic gelcoat, exterior layer, white
- Blister resistant vinyl ester resin in hull bottom skin coat
- Hull and superstructure linear polyester/polyurethane coating
- Polymer/copper based anti-fouling bottom paint
- Boot stripe, linear polyester/polyurethane coating
- Decks, non-skid surface, polyurethane paint with polymeric beads
- Solid fiberglass hull bottom
- Hull sides and superstructure laminated with PVC foam core
- Fiberglass stringers
- Steel laminated in stringers at key locations to bolt engine mounts
- Engine room bulkheads and decks of resin-infused composite construction using PVC foam core with layers of fiberglass laminate on each side

Hardware and Miscellaneous

- Wood bulkheads, cabinetry and trim with a satin or high-gloss polyester finish in cherry or African mahogany
- All hardware polished chrome with brushed chrome in galley
- Welded and polished 316L stainless-steel anchor chute and roller
- 110 pound plow anchor, anchor line and deck hawse pipe
- Windlass, Maxwell VWC-4,000 pound hydraulic with 300 feet of acculoy hot dipped galvanized chain with deck mounted control switches
- Integrated hydraulic digital 35 hp thruster/stabilizer system with 7.5 square foot fins
- Six polished stainless-steel springline cleats with chafing strips, through-bolted in aluminum backing plates
- Polished stainless-steel bow cleats, through bolted in aluminum backing plates
- Polished stainless-steel stern cleats, through bolted in aluminum backing plates
- Polished 1 1/4" stainless-steel rails on bow, side-deck and flybridge, drilled and tapped in aluminum backing plates
- Fog bell
- Dual air horns
- Zincs on rudders and shafts
- Stern staffs with ensign
- Black braided mooring lines (6)
- Alloy 22 high strength propeller shafts, 4"

- Manganese bronze dripless rudder seals
- Dripless shaft seals
- Life jackets (12)
- Life ring
- Portable "drychem" and fire extinguishers (13), U.L. approved type in compliance with United States Coast Guard and ABYC standards
- Stainless-steel trim tabs
- Integral manganese bronze struts
- Stainless-steel rudders
- 8-blade propellers, Nibral high performance
- MarQuipt Tide Ride eight step sea stairs with storage brackets
- Central vacuum with five outlets
- MarQuipt davit, 1500 pound, fully hydraulic, 126" boom
- Holding tank with sewage pump and overboard discharge
- Freshwater wash down, bow, with Hatteras patented quick disconnect
- Black fenders (4)
- Deck plates for fuel and water fills and waste pump-out
- Heavy duty engine couplings
- Engine and generator exhaust exits through hull side near transom
- Generator exhaust, water separator
- Rope locker storage hatch, bow deck
- 1400 gpd Sea Recovery watermaker
- Deep storage port and starboard, bow trunk

Engine Compartment and Bilge

- Water manifold blocks with centralized shut-off valve for sinks and showers
- Pultruded fiberglass rudder shelf with stainless-steel rudder tie bar
- AC fluorescent lights
- DC lights
- DC ventilation blower
- Twin diesel, freshwater-cooled main engines with electrically controlled marine gears, neutral interlocks, exhaust silencers, engine hour meters, alternators, fuel filters and seawater strainers
- FM200 fixed fire extinguishing system for engine/generator compartment with automatic and remote manual controls plus audible and visual discharge signals
- Two AC ventilation fans
- Two 27.5kW freshwater-cooled Electronic Quiet Diesel Onan generators(D) with shock mounts, sound enclosure, remote start, seawater strainer, fuel/water separator, hour meter, and water lift muffler

- Pressure and temperature controlled forced air induction system with water separators for engine combustion air and fans ducted from flybridge
- Polyethylene water lines
- Electric fuel transfer system with filtration and dry tank protection for pump (2)
- Freshwater fill hose for engines and generator
- AC compressed air system with air line and regulator
- Dockside water inlets with pressure regulating valve, automatic dockside tank fill and Hatteras patented quick disconnect
- 24-volt DC bilge and sump pumps, six at 3700 gph, one at 2200 gph with heavy-duty float switches and protective guards
- Bronze/chrome ball-valves through-bolted in solid fiberglass on all underwater through hull fittings with electrical bonding throughout
- Pressurized 230 volt AC freshwater pump
- U.L. Marine-listed fiberglass fuel tanks constructed with fire retardant resin with bronze fittings and coated with fire retardant paint
- Fiberglass water tanks, constructed with bronze fittings and materials which comply with the requirements of Title 21 for food and drugs.
- Sewage holding tank with 230 volt AC sewage pump, plumbed for dockside pump-out with 3/4 full display and alarm as part of systems monitor
- 110-volt AC oil changing system for engines, generators and gears with Hatteras patented quick disconnect
- U.L. Marine-listed fuel filter/water separator, generators
- Sealed shower sump, two each
- U.L. Marine-listed duplex fuel filters/water separators with bypass manifold, engines
- Electric fuel priming pumps, 24-volt DC, engines
- Welded and polished stainless-steel overhead grab rails
- Painted polyurethane engine room and bilges
- Air conditioning compressors, chilled water, (2) four-ton
- United States Coast Guard type A1 U.L. Marine approved fuel lines
- Discharge sea chests, 5
- 1" stainless-steel steering tie bar with pivoting self-aligning ball joint connection at all cylinder and tie bar connections

- Insulation in deck
- Gray water tanks, (2) plumbed, 126 gallons each, with 230 volt AC sewage pump, plumbed for dockside pump-out with 3/4 full display and alarm as part of systems monitor
- Pick-up sea chests
- Aluminum work bench forward and to starboard of engine

Electrical Systems

- Water heaters one 30 gallon, one 20 gallon midship and one 6 gallon aft for crew
- Two 24 volt banks of heavy-duty, 12 volt marine batteries (4) mounted in fire retardant fiberglass boxes
- U.L. 1426 listed boat cable, tin coated with insulation
- Gel/lead acid compatible 240 volt automatic programmable battery charger, 50/60Hz
- Automatic battery paralleling system with switch at control console
- Two 240 volt, 100 amp, transformer connected retractable shore cords, covered by hatch, with over-current protection and wireless remote control (bow deck)
- AC and DC lights and fixtures
- Battery control panels with fuses and isolation switches
- DC electronics panel with magnetic circuit breakers (flybridge)
- AC and DC distribution panels with magnetic circuit breakers
- AC switching panel with source selector switches, digital volt meter, ammeter, frequency meter, generator start/stop controls, voltage boost tap switch and interlock selector breakers
- Navigation lights, U.L. certified to United States Coast Guard and ABYC specifications
- Ground fault protection on AC receptacles and lighting circuits
- Chilled water air conditioning with reverse-cycle heating, with soft starting AC compressors, automatically staged and individually controlled with SMX controls in each compartment
- TV antenna, omni-directional
- SSB radio ground screen laminated in cabin top

Flybridge and Bridge Deck

- 484 square foot flybridge including 145 square foot boat deck
- Computer controlled ethernet monitoring system with LCD touch screen display providing visual and audible signals for engines, gears, generators, high bilge water, fire warning in engine compartment, fire extinguisher discharge in engine compartment, AC power loss, smoke detectors, all tank level indication, low battery voltage, alternator failure, battery charger failure, bilge pump control and run indication, holding tank pump control and run indication, and carbon monoxide detectors. A history log is maintained for critical alarms and trends may be set up to view various parameters with respect to time. Additional monitoring points may be added to the system economically and easily.
- Molded fiberglass bridge
- Northstar 6101i GPS/plotter, Icom VHF, Simrad autopilot repeater, Furuno RD30 depth and temp
- Polished stainless-steel grab rails
- Two L-shaped bridge deck seating with lights, vinyl-covered polyfoam cushions and storage
- Framed glass windshield
- Control station with necessary switches
- Painted (polyurethane) aluminum framed radar arch with mast, dual radar platform, and anchor light
- Compass with dimmable light
- Single-lever clutch and throttle controls (electronic) and engine synchronization
- Hydraulic power-assisted steering
- Adjustable helmsman and companion seat with covers (Pompanette)
- Sliding door to galley
- DC AM/FM stereo receiver with CD player and speakers
- Wet bar with sink, refrigerator, icemaker and three barstools
- Stairs from pilothouse to bridge
- Molded-in stairs to aft deck with hatch
- Neutral interlock switches allowing engine to start in neutral only
- Instrument cover
- Freshwater wash down with Hatteras patented quick disconnect
- Storage under control console with DC lighting

- solid-surface table with stainless-steel pedestal
- Sunpad with storage underneath
- Cabinet with Gaggenau double electric grills and storage

Optional Enclosed Flybridge (F)

- 229 square foot boat deck
- Computer controlled ethernet monitoring system with LCD touch screen display providing visual and audible signals for engines, gears, generators, high bilge water, fire warning in engine compartment, fire extinguisher discharge in engine compartment, AC power loss, smoke detectors, all tank level indication, low battery voltage, alternator failure, battery charger failure, bilge pump control and run indication, holding tank pump control and run indication, and carbon monoxide detectors. A history log is maintained for critical alarms and trends may be set up to view various parameters with respect to time. Additional monitoring points may be added to the system economically and easily.
- Molded fiberglass bridge
- Northstar 6101i GPS/plotter, Icom VHF, Simrad autopilot repeater, Furuno RD30 depth and temp
- Welded and polished stainless-steel rails and stanchions
- Elevated L-shaped lounge with storage to port, lounge to starboard
- Stone table with stainless-steel pedestals (choice of standard stone options)
- Twin helm chairs
- Lounge with storage on flybridge's port aft deck
- Fixed frameless windows with safety glass
- Intermittent electric windshield wipers/washers with controls
- Padded vinyl chart flat
- Forward control station with all necessary switches, single-lever electric clutch and throttle controls, synchronizer, back-up controls, power assisted steering, compass and electronic console
- Starboard fold-down wing station on boat deck
- Carpeting
- Wet bar with refrigerator, icemaker and bottle and glass storage
- Electric aft window, port
- 32" LCD TV

- DC AM/FM stereo receiver with CD/DVD player and speakers
- Sliding door
- AC duplex outlets
- Padded panel headliner (installed on track system for service access)
- Storage lockers, port and starboard
- Carbon monoxide detector
- Smoke detector

Optional Lower Helm (F)

- Computer controlled ethernet monitoring system with LCD touch screen display providing visual and audible signals for engines, gears, generators, high bilge water, fire warning in engine compartment, fire extinguisher discharge in engine compartment, AC power loss, smoke detectors, all tank level indication, low battery voltage, alternator failure, battery charger failure, bilge pump control and run indication, holding tank pump control and run indication, and carbon monoxide detectors. A history log is maintained for critical alarms and trends may be set up to view various parameters with respect to time. Additional monitoring points may be added to the system economically and easily.
- Control station with all necessary switches
- Integrated controls (electronic) with emergency back-up and engine synchronization
- Compass with dimmable light
- Hydraulic power assisted steering
- Intermittent electric windshield wipers/washers with controls
- Electric defogger
- Northstar 6101i GPS/plotter, Icom VHF, Simrad AP2504 autopilot repeater, Furuno RD30 depth and temp
- Helm seat (Pompanette)
- Elevated lounges with stone surface table (2) and stainless-steel pedestals (choice of standard stone options)

Aft Deck

- Molded fiberglass with non-skid sole
- Molded lounge with vinyl covered polyfoam cushions and storage underneath, with cover
- Molded fiberglass steps to flybridge
- Dual molded fiberglass steps, port and starboard, to swim platform with lights
- Boarding gates, port and starboard side decks

- Curved polished stainless-steel sliding door to salon
- Amplifier, speakers, and volume control integrated with Bose salon stereo
- Hardtop
- AC duplex outlet
- AC lighting in hardtop
- Steps to side decks, port and starboard
- Door with stairwell to crew's quarters/engine room
- Aft deck teak table with cover
- Fold-down wing station port side

Sport Deck

- Molded fiberglass with non-skid sole
- Freshwater wash down outlet with hose connection and Hatteras patented quick disconnect
- Welded and polished removable stainless-steel hoop rails
- Hand held hot/cold cockpit shower with cover
- Molded-in fiberglass steps with DC lights to aft deck
- Pop-up cleats (2)
- Swim platform with stainless steel re-boarding ladder
- Weathertight Pacific Coast door to crew's quarters and engine room

Galley

- Amtico vinyl-strip flooring
- Padded panel headliner (installed on track system for service access)
- Fixed frameless windows with tinted safety glass
- Stairwell to flybridge (Enclosed flybridge)
- Lighted curved stairway and sliding door to flybridge (Open flybridge)
- Microwave/convection oven
- AC and DC lights and fixtures
- AC dimmable lights
- AC duplex outlets
- Genuine wood inserts on appliance fascias (except refrigerator) with satin or high-gloss polyester finish
- Amplifier, speakers, and volume control integrated with Bose salon stereo
- Stone table with stainless-steel pedestals (choice of standard stone options)
- Pantograph doors with locks, port and starboard, to side decks
- Stone countertops and backsplash with stainless sinks and storage cabinets made of finished wood (choice of standard stone options)

- Upright AC refrigerator with freezer and icemaker
- AC four-burner ceramic cooktop with oven under counter
- One-half hp continuous feed garbage disposal
- SMX HVAC compartment controlled
- Smoke detector
- Carbon monoxide detector
- Air conditioning dispersed over decorative valances, starboard (dining room)
- Dishwasher
- Trash compactor
- China/crystal/flatware storage and allowance, \$10,000

Salon

- Carpeting
- Padded panel headliner (installed on track system for service access)
- Custom designed decorative wood valance with silhouettes in recessed pockets
- Welded and polished curved stainless-steel sliding door to aft deck
- Buffet Cabinet
- China Cabinet
- 42" LCD TV with omni-directional antenna
- Bose Lifestyle 35 home theater with AM/FM, CD/DVD, and surround sound speakers
- Icemaker
- Fixed frameless windows with tinted safety glass
- AC and DC lights and fixtures
- AC dimmable lights
- AC duplex outlets
- Custom sofa with storage
- Throw pillows
- Air conditioning dispersed through decorative valances, port and starboard
- DC low level lighting behind salon valances, port and starboard
- Coffee table
- Two club chairs
- Carbon monoxide detector
- Smoke detector
- SMX HVAC compartment controlled
- Formal dining table with six chairs
- End table (2 tables with enclosed bridge option)
- Wet bar with bottle and glass storage
- Decorative soffit design in headliner with wood accents

Lower Forward Companionway

- Carpeting
- Padded panel headliner (installed on track system for service access)
- Padded panels on hullside(s) and bulkhead(s) (installed on track system for service access)
- Flush panel door with door stop to master stateroom and guest staterooms
- Lighted stairway to upper deck
- DC light fixtures
- Washer/dryer
- Cedar-lined linen storage locker

Master Stateroom

- Carpeting
- Padded panel headliner (installed on track system for service access)
- Padded panels on hullside(s) and bulkhead(s) (installed on track system for service access)
- King-sized berth with upholstered headboard and cedar-lined storage underneath, accessed via pneumatic cylinders
- Upholstered berth base
- HMC coil spring mattress, spread, throw pillows, pillows, pillow shams, mattress pad and sheets(E)
- Cedar-lined wardrobe(s) with automatic lights
- Nightstands with drawers
- Dressers with drawers, port and starboard
- 32" LCD TV
- Bose 3-2-1 GS with AM/FM and DVD/CD w/speakers
- Full-length mirror
- AC and DC lights and fixtures
- AC dimmable lights
- DC low level lights
- AC duplex outlets
- Private access to head
- Smoke detector
- Carbon monoxide detector
- Decorative wood valance with fixed Roman shade and duettes
- SMX HVAC compartment controlled
- Ventilating portlight with screen and five additional fixed portlights; each hatch is 16" x 28"
- Safe

Bow Guest Stateroom

- Carpeting
- Padded panel headliner (installed on track system for service access)
- Padded panels on hullside(s) and bulkhead(s) (installed on track system for service access)
- Queen-sized tapered berth with upholstered headboard and cedar-lined storage with drawer underneath accessed via pneumatic cylinders
- Upholstered berth base
- HMC coil spring mattress, spread, throw pillows, pillows, pillow shams, mattress pad and sheets(E)
- Cedar-lined hanging locker with automatic light, port and starboard
- Nightstands, port and starboard
- 19" LCD TV
- Bose 3-2-1 GS with AM/FM and DVD/CD w/speakers
- Full-length mirror
- AC and DC lights and fixtures
- AC dimmable lights
- DC low level lights under berth
- AC duplex outlets
- Private access to head
- Smoke detector
- Carbon monoxide detector
- Fluted wood valance with air conditioning dispersed through soffits, port and starboard
- SMX HVAC compartment controlled
- Screened overhead hatch with privacy cover
- Overhead storage cabinets, port and starboard
- Steps to bow stateroom with DC low level lights

Port Guest Stateroom

- Carpeting
- Padded panel headliner (installed on track system for service access)
- Padded panels on hullside(s) and bulkhead(s) (installed on track system for service access)
- Queen-sized tapered berth with upholstered headboard and cedar-lined storage underneath accessed via pneumatic cylinders
- Upholstered berth base
- HMC coil spring mattress, spread, throw pillows, pillow shams, pillows, mattress pad and sheets(E)

- Cedar-lined hanging locker with automatic light
- Nightstands with drawers
- Dresser
- 19" LCD TV
- Bose 3-2-1 GS with AM/FM and DVD/CD w/speakers
- Full-length mirror
- AC and DC lights and fixtures
- AC dimmable lights
- AC duplex outlets
- Private access to head
- Smoke detector
- Carbon monoxide detector
- Fluted wood valance with fixed Roman shade and duette with air conditioning dispersed through soffits
- SMX HVAC compartment controlled
- Ventilating portlight with screen
- Blanket lockers above berth and hullsides

Starboard Guest Stateroom

- Carpeting
- Padded panel headliner (installed on track system for service access)
- Padded panels on hullside(s) and bulkhead(s) (installed on track system for service access)
- Twin criss-crossed berths
- Upholstered berth base
- Polyfoam mattresses, spreads, throw pillows, pillows, pillow shams, mattress pads and sheets(E)
- Cedar-lined hanging locker with automatic light
- Nightstand with drawers
- Dresser
- DC AM/FM stereo receiver with CD player and speakers
- Full-length mirror
- AC and DC lights and fixtures
- AC dimmable lights
- DC low level lights under berth
- AC duplex outlets
- Private access to head
- Smoke detector
- Carbon monoxide detector
- SMX HVAC compartment controlled

Master Head

- Stone flooring (choice of standard stone options)
- Padded panel headliner (installed on track system for service access)
- Wallcovering
- Stone countertop, backsplash, and sidesplash with two undermount sinks (choice of standard stone options)
- Stone baseboards (choice of standard stone options)
- Stone shower with frameless door (choice of standard stone options)
- Storage cabinet with mirror
- Base cabinet to match interior finish with storage
- Towel bar
- Headhunter freshwater toilet
- 120 volt AC air freshener blower
- AC and DC lights and fixtures
- DC low level lights under toe kicks
- AC duplex outlet
- Plexi-mirror around upper cabinet
- Air conditioning vent
- Holding tank $\frac{3}{4}$ full indicator light

Optional His and Her Master Heads (F)

- Includes standard master head features plus:
 - Upgraded stone shower with frameless doors (choice of standard stone options)
 - Additional storage cabinet with mirror
 - Additional plexi - mirror around upper cabinet
 - Additional towel bar
 - Additional Headhunter freshwater toilet

Guest Heads

- Stone flooring (choice of standard stone options)
- Padded panel headliner (installed on track system for service access)
- Wallcovering
- Stone countertop, backsplash and sidesplash with porcelain undermount sink (choice of standard stone options)
- Stone baseboards (choice of standard stone options)
- Stall shower with door (bow and starboard)
- Tub with sliding door (port)
- Mirror
- Base cabinet to match interior finish with storage

- Towel bar
- Headhunter freshwater toilet
- 120 volt AC air freshener blower
- AC and DC lights and fixtures
- DC low level lights under toe kicks
- AC duplex outlet
- Plexi-mirror around upper cabinet
- Air conditioning vent
- Holding tank $\frac{3}{4}$ full indicator light

Day Head

- Amtico vinyl-strip flooring
- Plexi-mirrored ceiling
- Wallcovering
- Vanity with stone countertop, sidesplash and baseboards with porcelain undermount sink (choice of standard stone options)
- Hardwood baseboards
- Glass mirror above vanity
- Base cabinet to match interior finish with storage
- Towel ring
- Headhunter freshwater toilet
- 120 volt AC air freshener blower
- AC and DC lights and fixtures
- DC low level lights under toe kicks
- AC duplex outlet
- Air conditioning vent
- Holding tank $\frac{3}{4}$ full indicator light

Crew Stateroom

- Carpeting
- Padded panel headliner (installed on track system for service access)
- Padded panels on hullside(s) and bulkhead(s) (installed on track system for service access)
- Over/under berths port side and queen berth starboard side
- Padded berth base
- Polyfoam mattress, spread, pillow, pillow shams, mattress pads and sheets (E)
- Cedar-lined hanging locker with doors and automatic light
- 19" LCD TV (Captain's stateroom)
- DC AM/FM stereo receiver with CD/DVD player and speakers (Captain's stateroom)
- Full-length mirror
- AC and DC lights and fixtures
- AC duplex outlets
- Smoke detector
- Carbon monoxide detector

- SMX HVAC compartment controlled
- Curved stairwell from aft deck
- Watertight door from swim platform

Crew Head

- Amtico vinyl-strip flooring
- Padded panel headliner (installed on track system for service access)
- Wallcovering
- solid-surface countertop with integral sink and storage cabinet
- Stall shower with door
- Mirror
- Towel bar
- Headhunter freshwater toilet
- Recirculating fan
- AC and DC lights and fixtures
- AC duplex outlet
- Air conditioning vent
- Holding tank $\frac{3}{4}$ full indicator light

Crew Area

- Amtico vinyl-strip flooring
- Microwave/convection oven
- Refrigerator



Footnotes

- (A) Right is reserved to make changes at any time, without notice, in prices, material, specifications and equipment. Orders are accepted subject to prices prevailing at time of shipment. Orders requesting any material and/or equipment which differ from that selected by Hatteras as standard or optional for this model will be considered a custom change and will require additional charges. Prices shown for many options may apply only if ordered prior to start of production. Once production begins, orders for such options may require additional charges due to non-standard installation requirements and/or lead times. In order to show equipment size and location, line drawing may include some optional items. Specifications, standard equipment and optional equipment effective with boats sold at August 1, 2008 through July 31, 2009 Hatteras Base Prices.
- (B) Length overall does not include the optional swim platform or bow pulpit.
- (C) Weight, draft, and freeboard are based on an estimate of model's displacement with largest engines available and all tanks filled. Heights are estimated with largest engines and all tanks empty. Actual figures will vary depending on production tolerances, equipment, supplies and stores on board, as well as operational and sea conditions. Capacities of tanks are estimated to be total capacity of all tanks normally furnished in this model. Usable capacities will vary depending upon conditions.
- (D) Generator is not intended to supply power for all standard and optional accessories simultaneously. Load must be limited to generator output rating.
- (E) One set of sheets includes: one bottom sheet, one top sheet, pillowcase(s).
- (F) Option must be ordered prior to start of production. Price shown reflects cost of scheduled installation requirements. A late request for this option will require an additional charge.

